



**UV222™** Effective and safe  
disinfection for everyday life

UV Medico

# Innovative solutions for a safer and healthier future

The wavelengths of Far UV-C rapidly inactivate SARS-CoV-2, the virus that causes COVID-19, as well as other common airborne and surface pathogens such as bacteria, mould, mites, spores, fungi, and even antibiotic-resistant superbacteria like MRSA.

In partnership with Ushio, developer and owner of the patented technology Care222, the UV222 lamp from UV Medico harnesses this game-changing technology and thus offers a highly effective solution for surface and air disinfection. The UV222 can be used in all spaces and is safe to use in presence of people.

UV222 is an essential tool to prevent the spread of existing and emerging viruses and other potential infections. The lamp is an answer to the challenges we face from COVID-19 as well as from similar threats in the future.



Care222 is a Far UV-C disinfection technology using 222 nm excimer lamps combined with an optical filter, which blocks wavelengths above 230 nm that can be potentially harmful to human skin and eyes.

Care222 is a trademark or registered trademark of Ushio Inc. and Ushio America Inc.

## Facts about UV222™

Safety	UV222 is 100% safe to use in presence of humans and animals, and fully complies with the international standards of UV radiation.
Efficacy	222nm is an effective disinfection method with immediate proven results. Research from across the world has proven 222 nm germicidal effect.
Knowledge	UV222 is developed and engineered in cooperation with several universities and is thoroughly tested and documented. UV222 can only be installed by authorised installers.
Ecological	Does not contain mercury. Disinfection without chemicals or residue.


## UV222 specifications

Light source	Krypton chloride excimer lamp
Wavelength	222 nm
60° output	115 mW (Typical)
100° output	70 mW (Typical)
Input voltage	85-305V AC 50/60 Hz
Max power consumption	17 W
Mode	Continuous / duty cycle / motion activated
Weight	1.9 kg (4.19 lbs)
Dimensions	303.45 x 120.00 x 75.25 mm (11.9 x 4.7 x 3.0 in)
Power lead (PVC)	3 x 0.75 mm <sup>2</sup> (18 AWG)
Operating temperature	0° to +50° C (32° to 122° F)
Ambient humidity	5-90% RH Non condensing



### Colours

Standard colour: White (RAL 9010 mat).  
Custom colour on request.

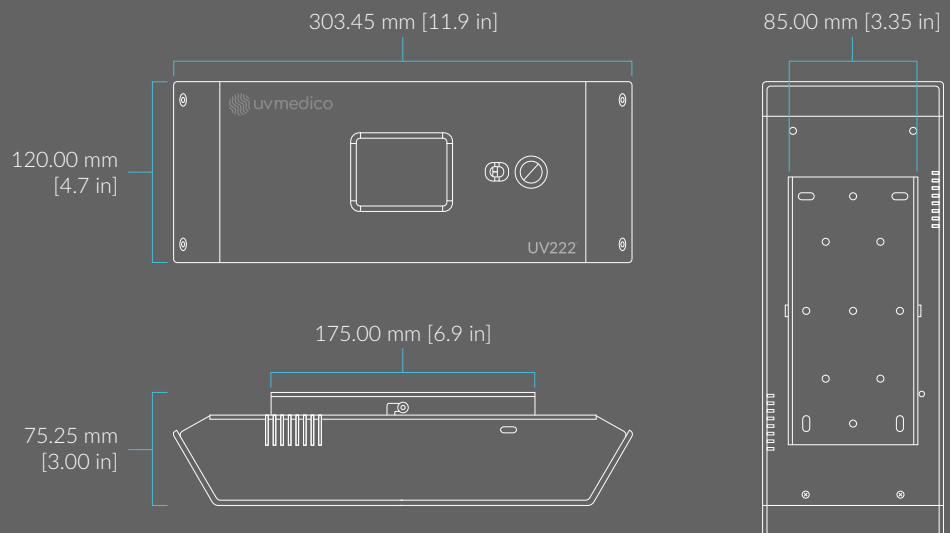

# UV222 Vehicle

## Ambulances and lifts

Small indoor spaces, such as vehicles and lifts, provide the right conditions to boost the spread of pathogens. To meet the increasing demands for higher hygiene, we have created UV222 Vehicle, to reduce the risk of infection in these areas.

UV222 Vehicle can be easily installed in ambulances, where fast and proper disinfection is essential for the transport of patients. The lamp will provide a continuous extra layer of disinfection without extending the cleaning process.


Lifts have also been appointed during the pandemic as sensitive areas for transmission of pathogens, and many are installed in buildings without proper ventilation systems. UV222 Vehicle can provide a disinfection as efficient as 35 air changes per hour.

Filtered Far UV-C light source

Communication LED

Lidar

Motion sensor

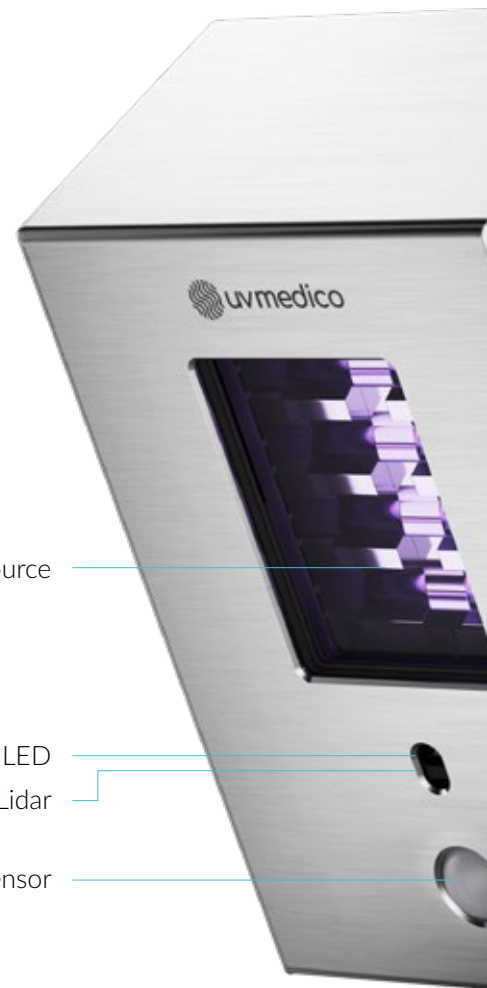






## UV222 Vehicle specifications

Light source	Krypton chloride excimer lamp
Wavelength	222 nm
60° output	115 mW (Typical)
100° output	70 mW (Typical)
Input voltage	9-32 V DC
Max power consumption	17 W
Mode	Continuous / duty cycle / motion activated
Weight	1.3 kg (2.86 lbs)
Dimensions	161 x 170 x 136 mm (6.30 x 6.70 x 5.4 in)
Power lead (PVC)	3 x 0.75 mm <sup>2</sup> (18 AWG)
Operating temperature	0° to + 50° C (32° to 122° F)
Ambient humidity	5-90% RH Non condensing

### Colours

Standard colour:  
Brushed aluminium.  
Custom colour on request.

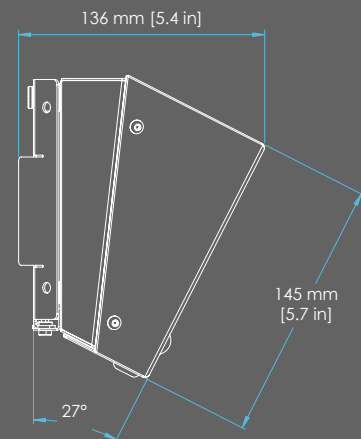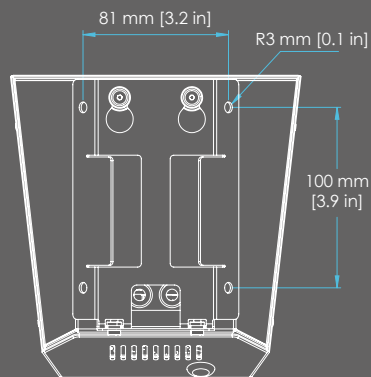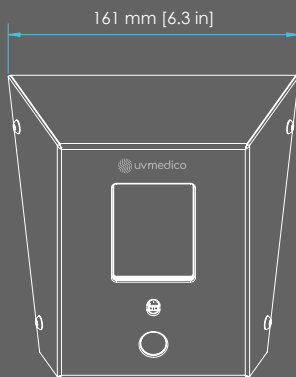

# UV222 Industrial

## For industry use

Ultraviolet light is widely used for disinfection in many industries, including medicine and food processing. The application of this technology in livestock production is a more recent development and is increasingly being used, especially on swine farms, as producers look for ways to improve biosecurity in response to frequent outbreaks of devastating diseases, such as African swine fever.

UV222 Industrial has been developed combining the benefits Far UV-C light and a housing adapted to the hardest environments. Thanks to its IP66 rating, UV222 Industrial is protected against pressurised water and designed to stand extreme temperatures, which makes it ideal for the disinfection of production areas, barns, and stables for the protection of living animals, offering continuous disinfection with a harmless radiation.



Filtered Far UV-C light source




## UV222 Industrial specifications



Light source	Krypton chloride excimer lamp
Wavelength	222 nm
60° output	115 mW (Typical)
100° output	70 mW (Typical)
Input voltage	85-305V AC 50/60 Hz
Max power consumption	17 W
Mode	Continuous / duty cycle
Weight	3 kg (6.6 lbs)
Dimensions	300 x 168 x 113 mm (11.8 x 6.6 x 4.4 in)
Power lead (rubber)	3 x 0.75 mm <sup>2</sup> (18 AWG)
Ambient temperature	-10° to + 50° C (14° to 122° F)
Ambient humidity	5-90% RH

### Colours

Standard colour:  
Brushed aluminium.  
Custom colour on request.

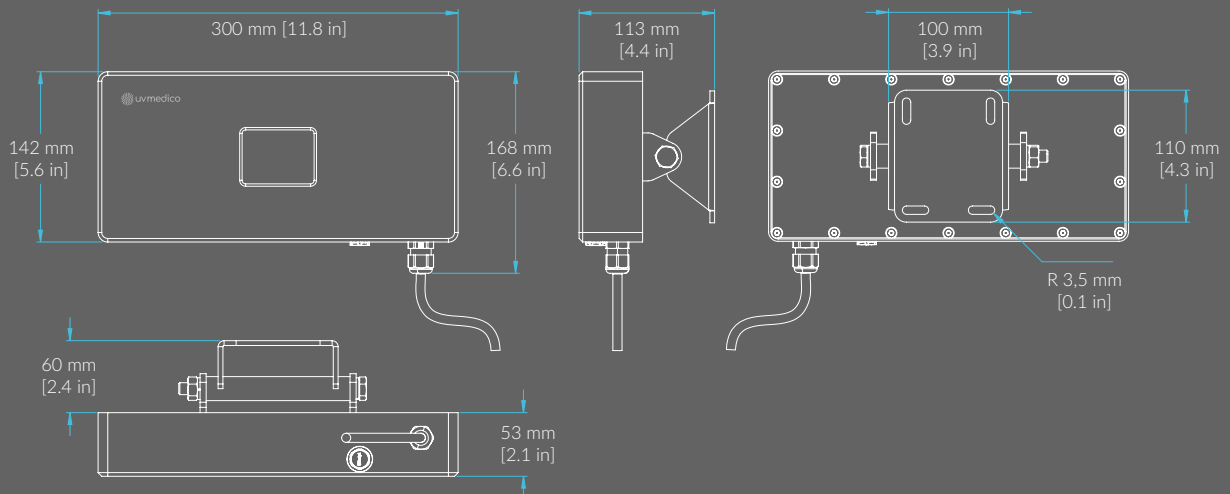

# UV222 Downlight

## Ceiling spot

Children and young adults are among the most vulnerable, being particularly affected by the pandemic, during which over 90% of schools worldwide were fully or partially closed. Many organisations have pointed out the high risk of inter-generational inequality, and the need to find new solution to prevent this in the future.


Far UV-C has been identified as the best emerging technology to fight the spread of pathogens in occupied spaces. UV222 Downlight can add substantial protection against aerosolised pathogens in high-traffic classrooms, offices and hallways.

Filtered Far UV-C light source

Motion sensor

Communication LED

Lidar

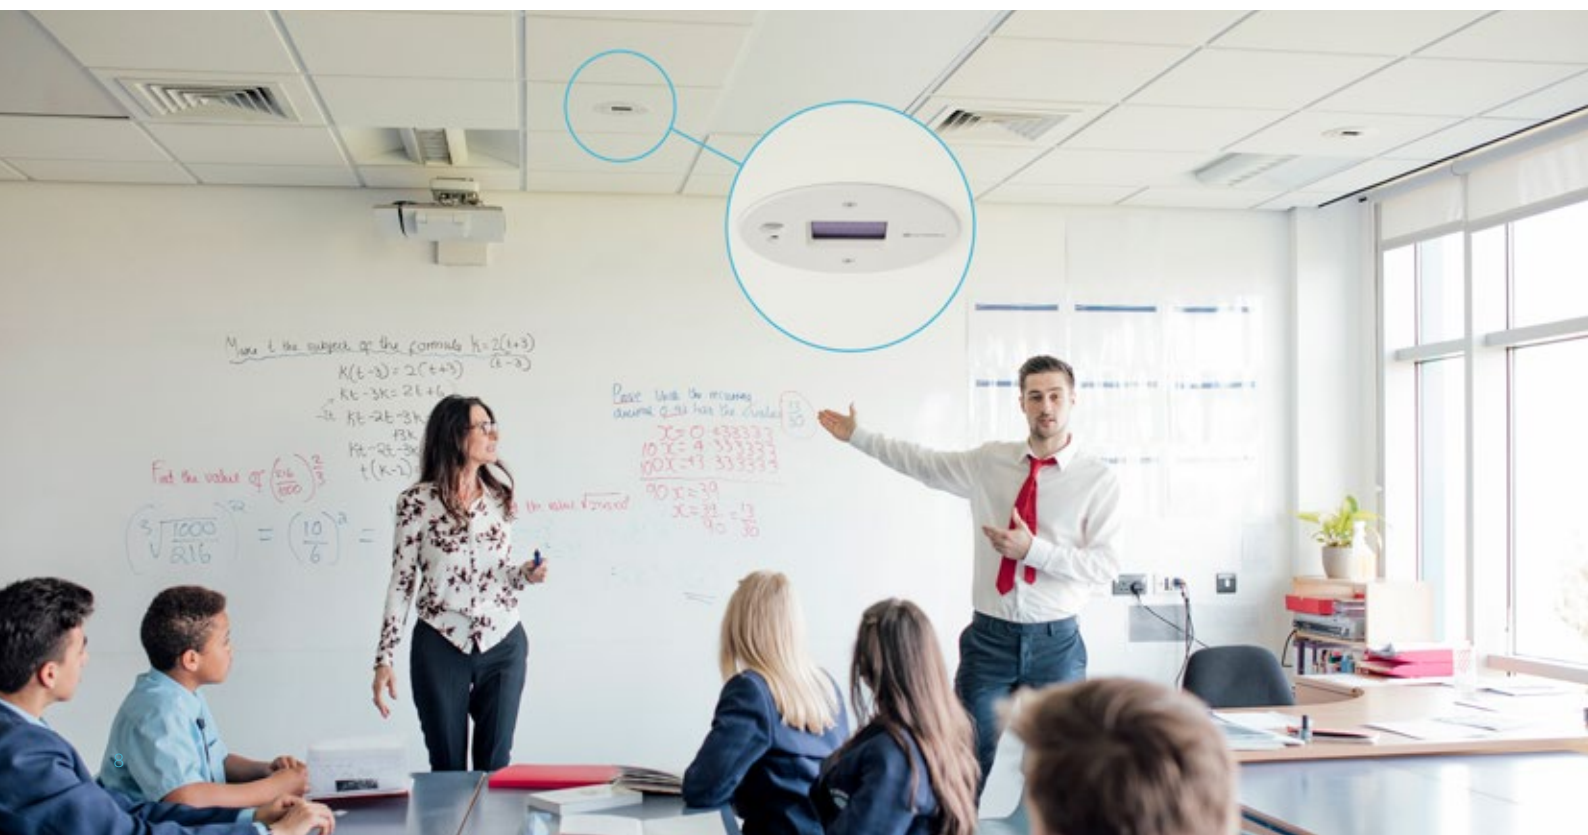







## UV222 Downlight specifications

Light source	Krypton chloride excimer lamp
Wavelength	222 nm
60° output	115 mW (Typical)
100° output	70 mW (Typical)
Input voltage	85-305V AC 50/60 Hz
Max power consumption	17 W
Mode	Continuous / duty cycle / motion activated
Weight	1.6 kg (3.5 lbs)
Dimensions	Ø 178 mm x 129 mm (Ø 7 in x 5 in)
Power lead (PVC)	3 x 0.75 mm <sup>2</sup> (18 AWG)
Operating temperature	0° to + 50° C (32° to 122° F)
Ambient humidity	5-90% RH Non condensing

### Colours

Standard colour:  
White (RAL 9010 mat).  
Custom colour on request.

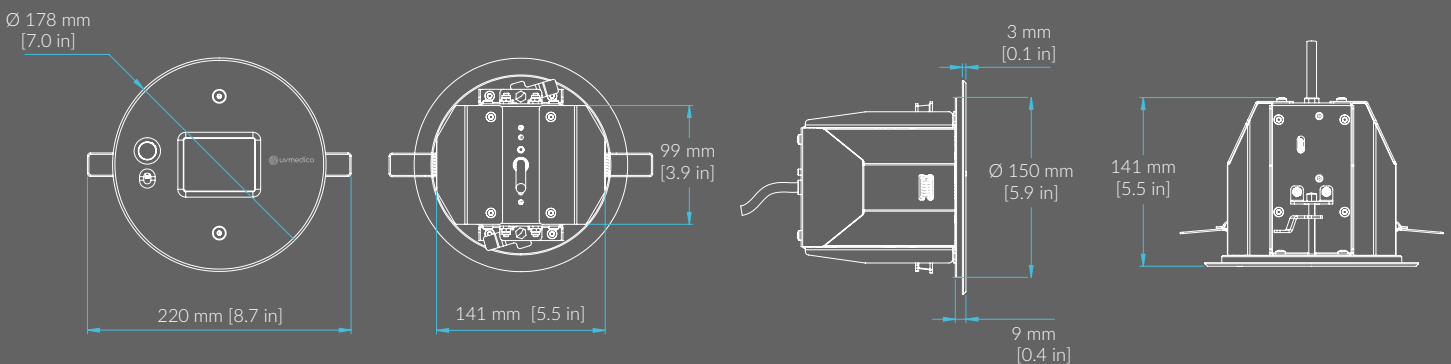


# UV222 Pendant

## Adjustable height

The hospitality sector presents a special challenge in the prevention of the spread of viruses and bacteria, due to frequent gathering of customers in closed spaces. It only requires a diseased individual to release into the atmosphere the potentially infectious pathogen, that will then be carried all over the room.

Transmission of bacteria can take place also via surfaces. Tables, chairs, and menus are among the most typical places to find bacteria agglomerations. UV222 Pendant targets the disinfection of air and surfaces in the hospitality industry to protect customers and employees. Deeper and safer disinfection made possible, with an elegant design easily integrated into any space.

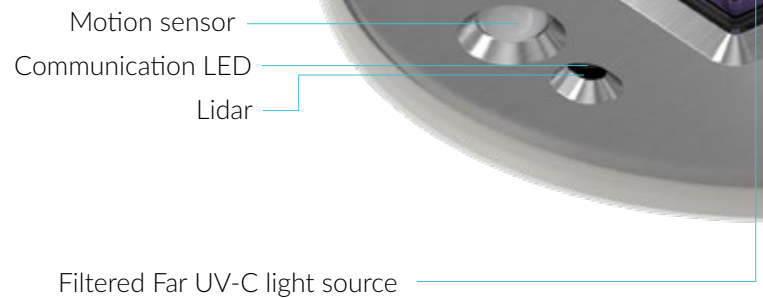





## UV222 Pendant specifications

Light source	Krypton chloride excimer lamp
Wavelength	222 nm
60° output	115 mW (Typical)
100° output	70 mW (Typical)
Input voltage	85-305V AC 50/60 Hz
Max power consumption	17 W
Mode	Continuous / duty cycle / motion activated
Weight	2.3 kg (4.48 lbs)
Dimensions	Ø 182 mm x 172 mm (7.2 in x 6.8 in)
Power lead (nylon)	3 x 0.75 mm <sup>2</sup> (18 AWG)
Ambient temperature	0° to + 50° C (32° to 122° F)
Ambient humidity	5-90% RH (Non condensing)

### Colours

Standard colour:  
White (RAL 9010 mat).  
Custom colour on request.

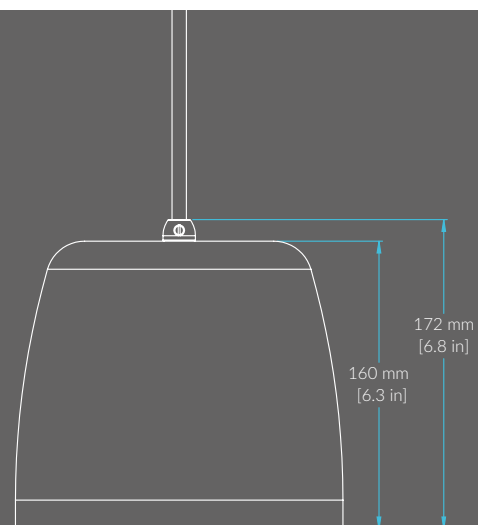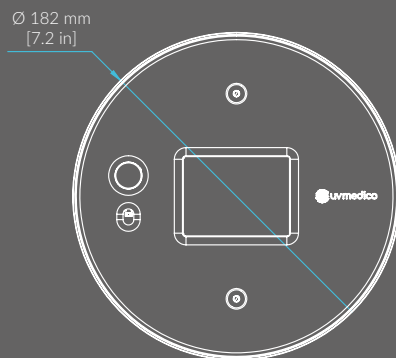

## Case Café Dan Turèll

# Serving in safe surroundings

Café Dan Turèll became the first restaurant in Copenhagen to install our human-safe far-UVC lamp, UV222, for continuous and efficient disinfection of the air and surfaces.

The preliminary results from Café Dan Turèll showed that it was possible to inactivate more than 99% of bacteria - matching previous results on viruses such as SARS-CoV-2.

This significantly reduces the spread of infectious diseases and provides safe surroundings for both customers and staff.

The UV222 is delivered in a custom yellow, ensuring a perfect match to the iconic styling in Café Dan Turèll.




## Case Aarhus University Hospital

# Protecting vulnerable patients

Our lamps are installed in the waiting area of the Department of Respiratory Diseases and Allergy at Aarhus University Hospital (AUH), for the protection of vulnerable patients.

In a joint effort between Aarhus University and AUH, disinfection of surfaces in the area has been tested. Results show that UV222 exposure significantly reduces the overall bacterial load and eliminates pathological bacterial species in this out-patient clinic daily.

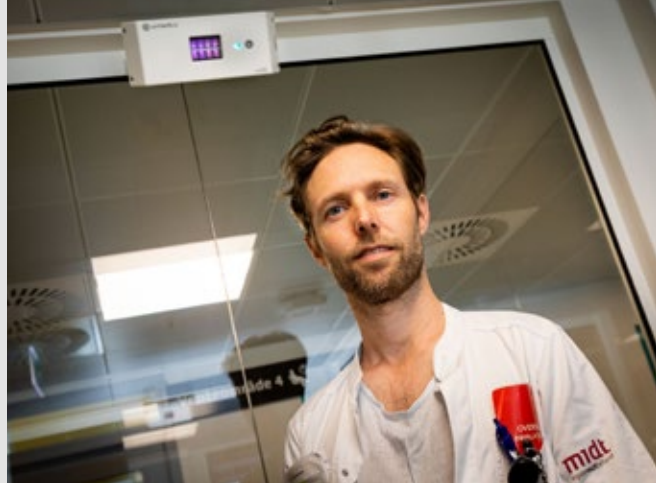


Søren Helbo, Ward Doctor at the Lung Clinic in Aarhus University Hospital.



### Facts about waiting area

Dimensions	W: 3 m x L: 3 m x H: 2.8 m (9' 11" x 9' 11" x 9' 2")
Area	9 m <sup>2</sup> (97 ft <sup>2</sup> ) - 8 persons
Inventory	8 chairs
Number of UV222™	2

## 60° beam angle

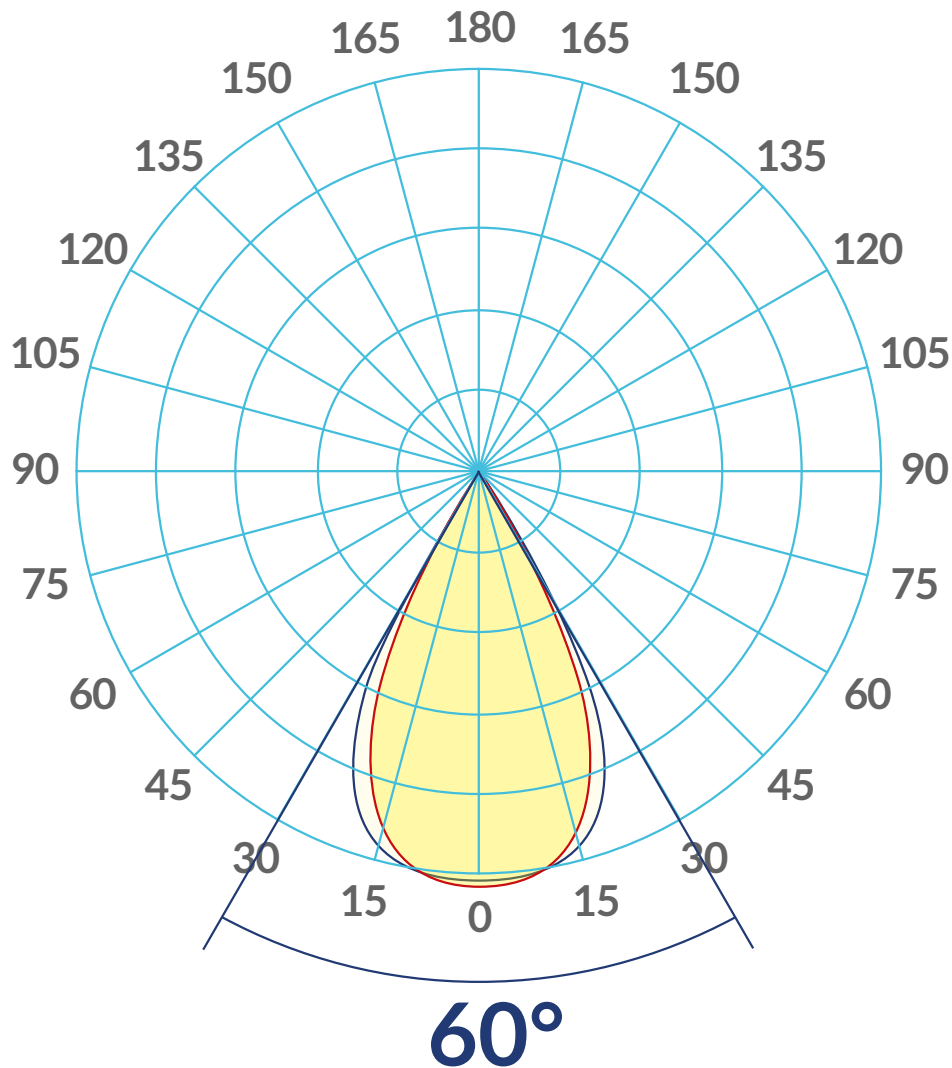

## Light measurement results

Output - total optical power flux, 200 nm - 850 nm	126.92 mW
Far UV-C 200 nm - 230 nm	120.79 mW
VIS-IR: 400 nm - 850 nm	6.81 mW
Radiated power/lamp power	0.926 %
Peak emission wavelength	222 nm
UV (222 nm) irradiance at centre at 1 m (3' 10")	13.8 $\mu\text{W}/\text{cm}^2$
Beam angle	60 °

## Exposure time with 60° UV222 - SARS-CoV2/COVID-19


Peak emission wavelength	222 nm
Output power in range (200-230 nm)	115 mW
Dose needed (222 nm, COVID-19) 90% inactivation for aerosols	390 $\mu\text{J}/\text{cm}^2$
Dose needed (222 nm, COVID-19) 90% inactivation for surfaces	600 $\mu\text{J}/\text{cm}^2$

### Exposure time to reduce 90% of SARS-CoV2

Surfaces Surface spanned by beam angle
43 sec. at centre 1 min. 27 sec. for 1.05 m <sup>2</sup> 11.26 ft <sup>2</sup>
2 min. 54 sec. at centre 5 min. 48 sec. for 4.19 m <sup>2</sup> 45.09 ft <sup>2</sup>
6 min. 31 sec. at centre 13 min. 3 sec. for 9.42 m <sup>2</sup> 101.39 ft <sup>2</sup>
11 min. 36 sec. at centre 23 min. 11 sec. for 16.75 m <sup>2</sup> 180.29 ft <sup>2</sup>
18 min. 7 sec. at centre 36 min. 14 sec. for 26.18 m <sup>2</sup> 281.80 ft <sup>2</sup>

### Aerosols


29 sec.
1 min. 56 sec.
4 min. 21 sec.
7 min. 44 sec.
12 min. 5 sec.

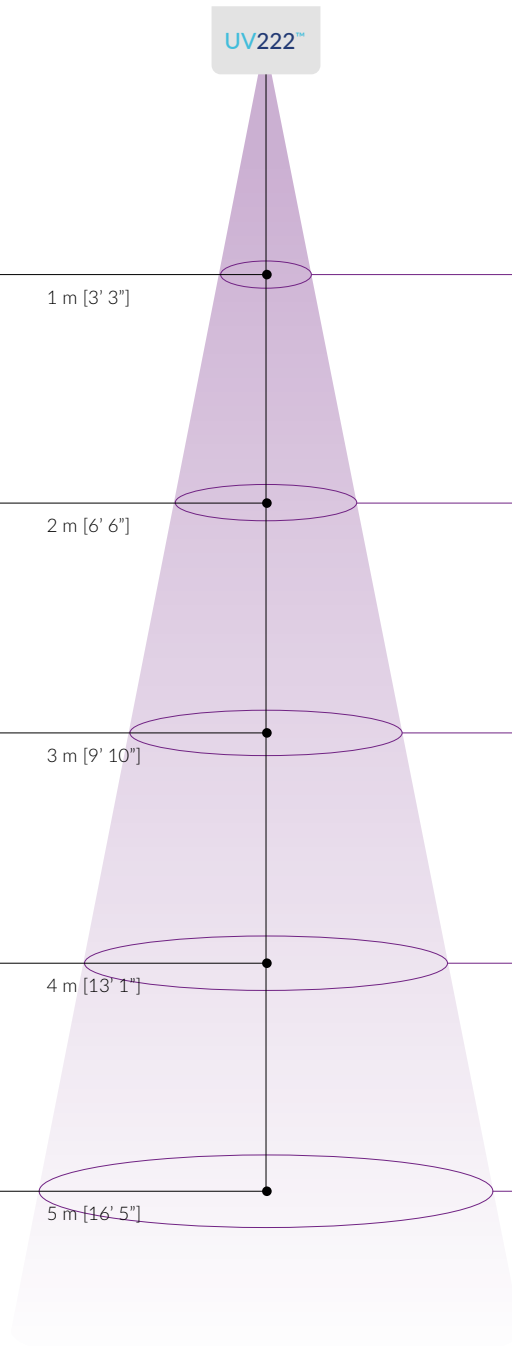

### 60° photometrics

Surfaces	Irradiance at centre
Diameter: 1.15 m Surface: 1.05m <sup>2</sup> 3' 9" 11.26 ft <sup>2</sup>	13.8 $\mu\text{W}/\text{cm}^2$
Diameter: 2.30 m Surface: 4.19 m <sup>2</sup> 7' 6" 45.09 ft <sup>2</sup>	3.42 $\mu\text{W}/\text{cm}^2$
Diameter: 3.46 m Surface: 9.42 m <sup>2</sup> 11' 4" 101.39 ft <sup>2</sup>	1.52 $\mu\text{W}/\text{cm}^2$
Diameter: 4.62 m Surface: 16.75 m <sup>2</sup> 15' 2" 180.29 ft <sup>2</sup>	0.86 $\mu\text{W}/\text{cm}^2$
Diameter: 5.77 m Surface: 26.18 m <sup>2</sup> 18' 11" 281.80 ft <sup>2</sup>	0.55 $\mu\text{W}/\text{cm}^2$

## 100° beam angle

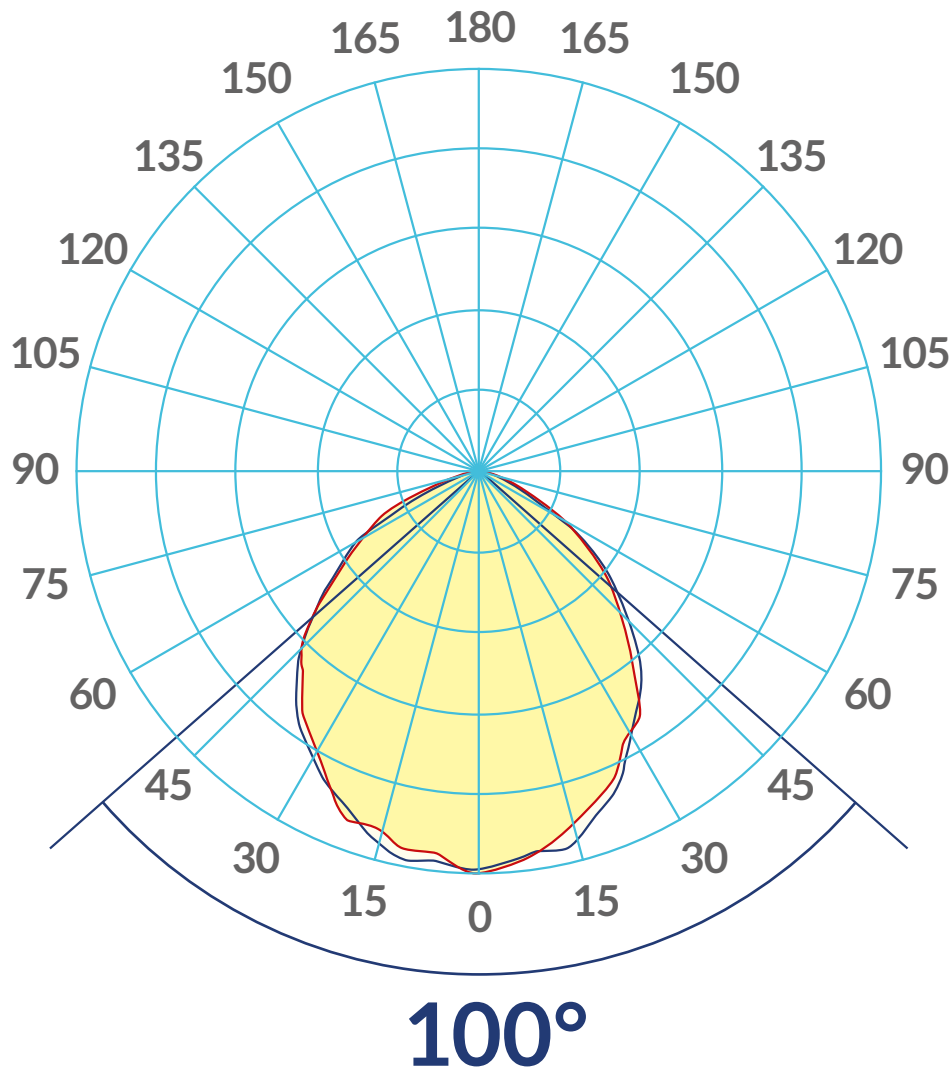

## Light measurement results


Output - total optical power flux, 200 nm - 850 nm	75.72 mW
Far UV-C 200 nm - 230 nm	58.79 mW
VIS-IR: 400 nm - 850 nm	10.71 mW
Radiated power/lamp power	0.57 %
Peak emission wavelength	222 nm
UV (222 nm) irradiance at centre at 1 m (3' 10")	3.2 $\mu\text{W}/\text{cm}^2$
Beam angle	100 °



## Exposure time with 100° UV222 - SARS-CoV2/COVID-19


Peak emission wavelength	222 nm
Output power in range (200-230 nm)	70 mW
Dose needed (222 nm, COVID-19) 90% inactivation for aerosols	390 $\mu\text{J}/\text{cm}^2$
Dose needed (222 nm, COVID-19) 90% inactivation for surfaces	600 $\mu\text{J}/\text{cm}^2$

### Exposure time to reduce 90% of SARS-CoV2

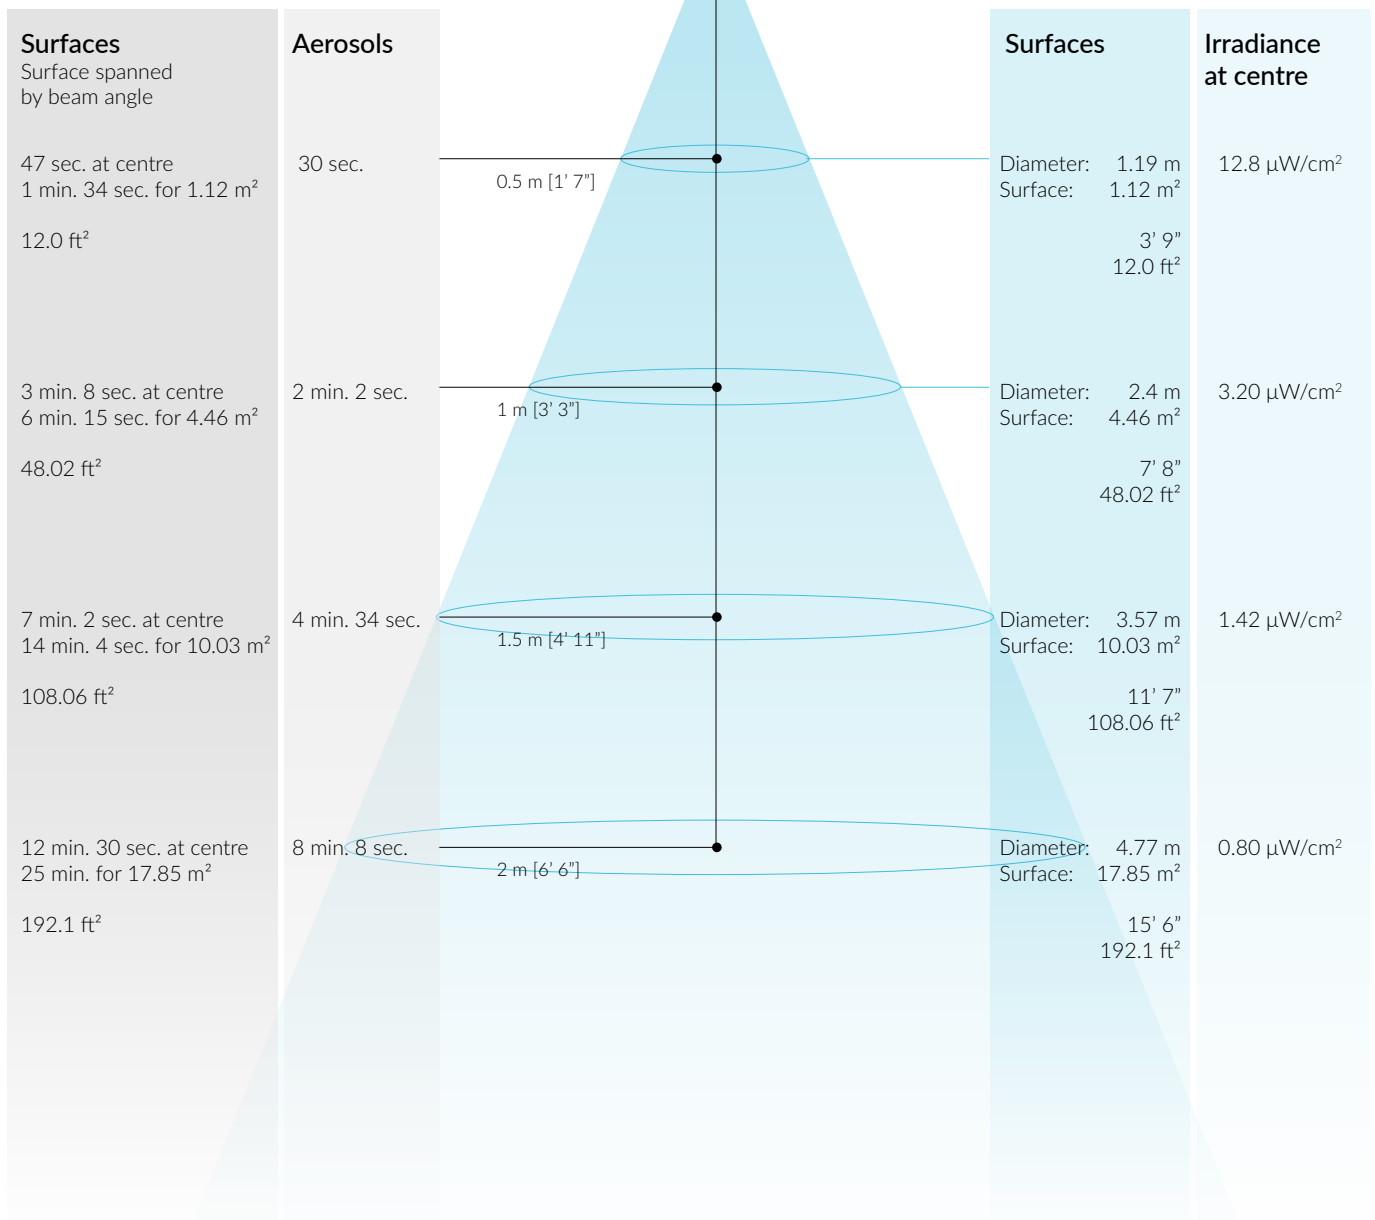

## History of UV-C light

Read about how UV-C light has been a part of our lives for over 100 years

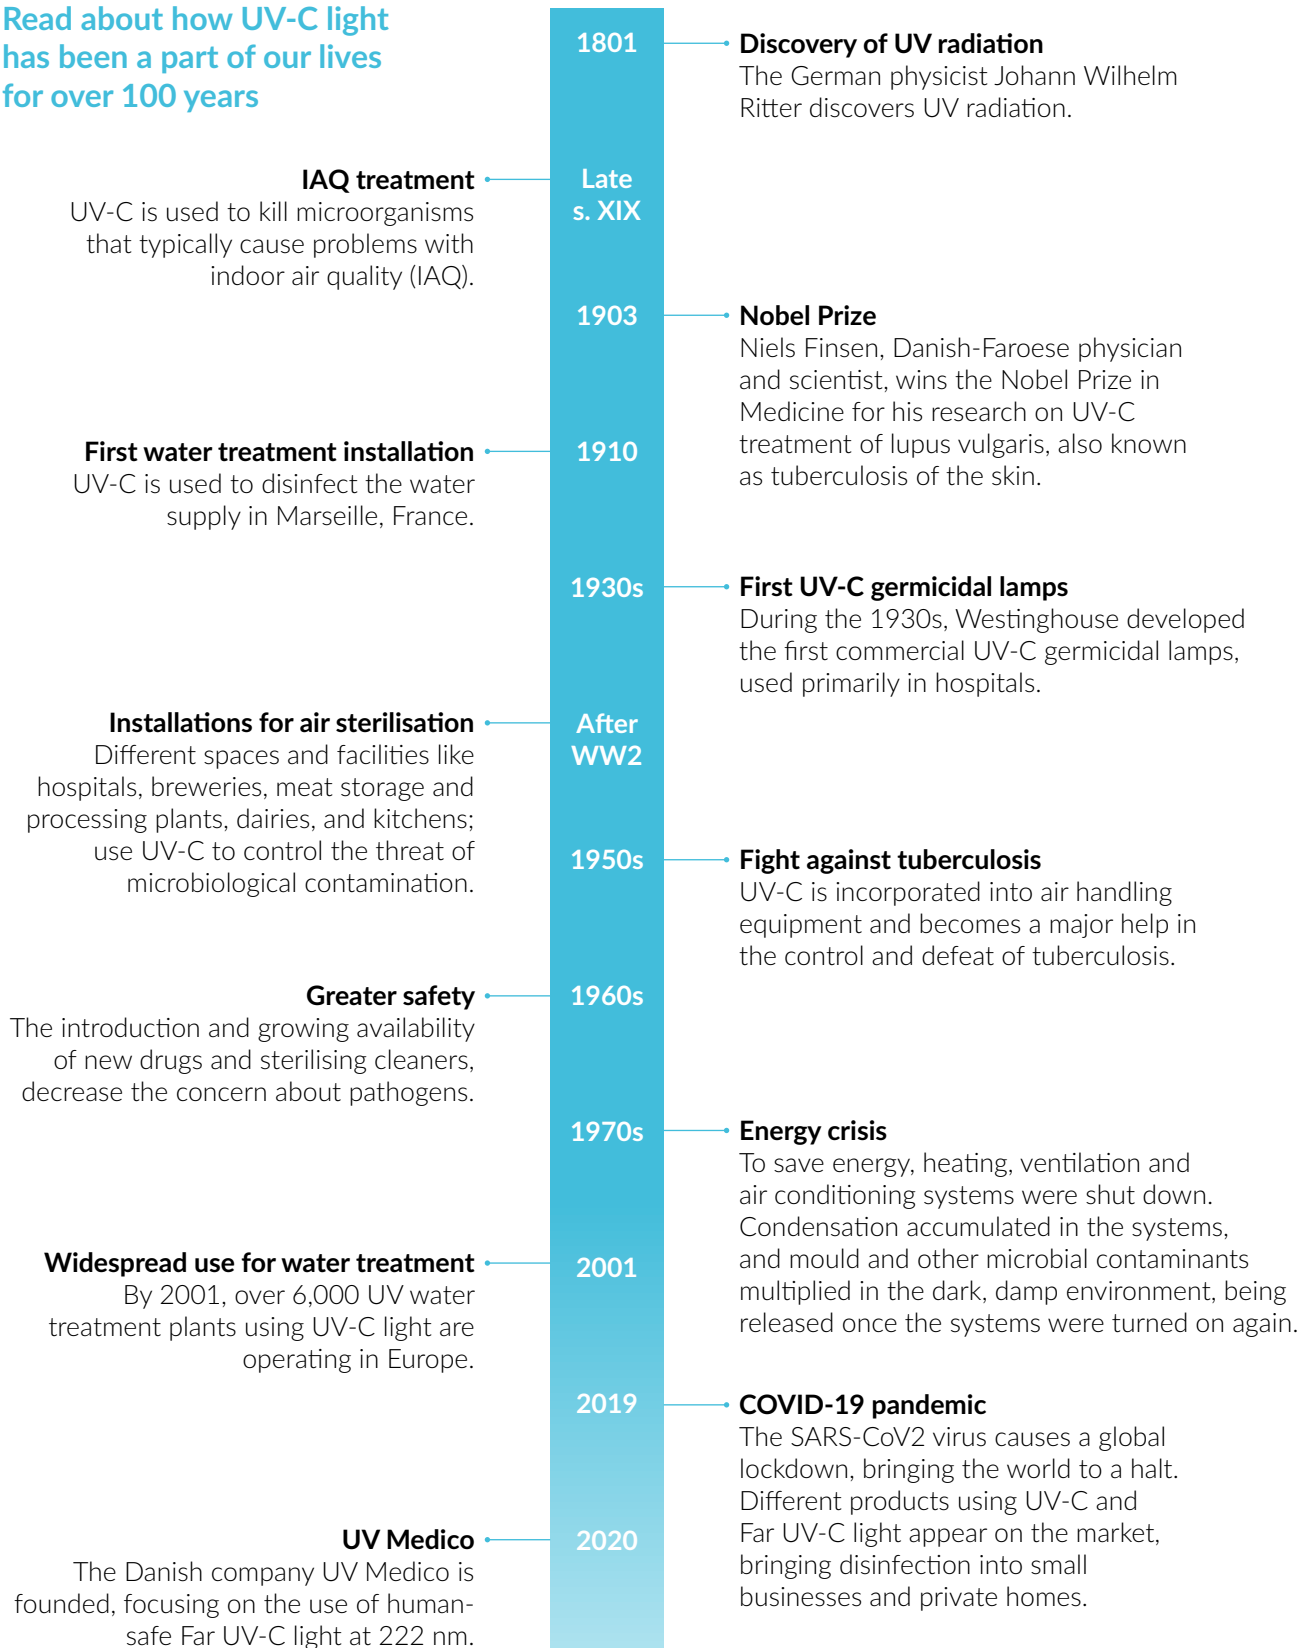

## How Far UV-C light inactivates pathogens

Microorganisms

**1.**

Energy from the Far UV-C 222 nm wavelength destroys surface proteins and penetrates the cell wall.

**2.**

The energy carried by Far UV-C damages the cell's DNA/RNA in multiple ways.

DNA

**3.**

The DNA/RNA damage inactivates the micro-organism, preventing it from replicating and infecting.

DNA

**4.**

Cells that cannot replicate or infect will die shortly after.

## Time to inactivate 90% of microorganisms<sup>1</sup>

<b>Distance 50 cm (1' 7")</b>				
<b>Bacteria</b>	Medium	Dose for 90% reduction <sup>2</sup>	60°, time [min]	100°, time [min]
Arthrobacter nicotinoverans	L	5.67	2	11
Bacillus subtilis	L	4.09	1	8
Clostridium sporogenes	L	2.87	1	6
Deinococcus radiodurans	L	29.65	9	59
Enterococcus faecalis	L	9.14	3	18
Enterococcus faecalis	S	7.59	2	15
Escherichia coli	L	2.1	1	9
Listeria monocytogenes	L	3.58	1	7
Pseudomonas aeruginosa	L	1.98	1	4
Salmonella Typhimurium	L	1.97	1	4
Staphylococcus aureus	S	4.69	1	9
Staphylococcus aureus	L	3.24	1	6
Streptococcus pyogenes	L	20.91	6	42
Yersinia enterocolytica	L	2.2	1	4

<b>Bacterial spores</b>	Medium	Dose for 90% reduction <sup>2</sup>	60°, time [min]	100°, time [min]
Alicyclobacillus acidoterrestris spores	L	6.02	2	12
Bacillus cereus spores	L	17.88	5	36
Bacillus pumilus spores	L	18.79	6	37
Bacillus pumilus spores	S	8.52	3	17
Bacillus subtilis spores	S	0.89	0.3	2
Bacillus subtilis spores	L	6.34	2	12
Bacillus thuringiensis spores	L	10.73	3	21
Chlostridium pasteurianum spores	L	2.63	1	5
Clostridioides difficile spores	L	13.23	4	26
Clostridioides difficile spores	S	16.67	5	33
Clostridioides sporogenes spores	L	10.37	3	21
Streptomyces griseus spores	S	14.38	4	29
Streptomyces griseus spores	L	6.67	2	13
Thermoactinomyces vulgaris spores	L	15.14	5	30

A Air (aerosols)  
 L Liquid, typically water  
 S Solid

<sup>1</sup> Hessling M. The impact of far-UVC radiation (200-230 nm) on pathogens, cells, skin, and eyes - a collection and analysis of a hundred years of data. GMS Hyg Infect Control. 2021 Feb 16;16:Doc07.

<sup>2</sup> Units are in mJ/cm<sup>2</sup>

**Distance 50 cm (1' 7")**

<b>Fungi</b>	Medium	Dose for 90% reduction <sup>2</sup>	60°, time [min]	100°, time [min]
Aspergillus niger spores	L	106.82	32	213
Candida albicans	L	9.82	3	20
Penicillium expansum spores	L	13.82	4	28
Saccharomyces cerevisiae	S	12.77	4	25
Saccharomyces cerevisiae	L	22.33	7	44
Trichophyton rubrum spores	L	13.64	4	27

<b>Viruses</b>	Medium	Dose for 90% reduction <sup>2</sup>	60°, time [min]	100°, time [min]
Adenovirus	L	5.09	2	10
Bacillus megatherium phage	S	4.79	2	10
Encephalomyocarditis virus	L	4.71	1	9
Feline calcivirus	L	9.57	3	19
Herpes simplex virus	L	0.96	0.3	2
Human coronavirus	A	0.48	0.1	1
Influenza virus	A	1.28	0.4	3
Phage MS2	L	8.35	3	17
Phage PhiX174	L	1.84	1	4
Phage Qbeta	L	5.12	2	10
Phage T1UV	L	2.84	1	6
Phage T2	L	3.36	1	6.7
Phage T7	L	1.72	0.5	3
Reovirus 3	L	3.3	1	7
Rotavirus	L	4.55	1	9
Severe Acute Respiratory Syndrome Coronavirus	S	1.2	0.5	2
Tulane virus	L	5.56	2	11
Vaccinia virus	L	6.53	2	13
Vesicular stomatitis virus	L	1.12	0.3	2

<b>Protozoa</b>	Medium	Dose for 90% reduction <sup>2</sup>	60°, time [min]	100°, time [min]
Cryptosporidium parvum	L	2.5	1	5

# Why is UV222™ safe?

- Thanks to the patented and unique filter technology Care222, UV222 emits at a narrow UV spectrum safe for human exposure.
- UV222 complies with the UL867 regulation on maximum concentration of ozone generation.

UV222 does not emit harmful wavelengths.

## In compliance with

### International Standard:


ISO 15858	UV-C Devices – Safety information – permissible human exposure.
IEC 62471	Photobiological safety of lamps and lamp systems.
IEC PAS 63313 ED1	Position statement on germicidal UV-C irradiation – UV-C safety guidelines (see Global Lighting Association).

### International Guidelines:

ACGIH® (American Conference of Governmental Industrial Hygienists)	2021 TLV (Threshold Limit Values) & BEI (Biological Exposure Indices) for chemical substances and physical agents.
--	--

### WARNING!

Unfiltered Far UV-C can cause cancer and may increase the risk of cataracts!

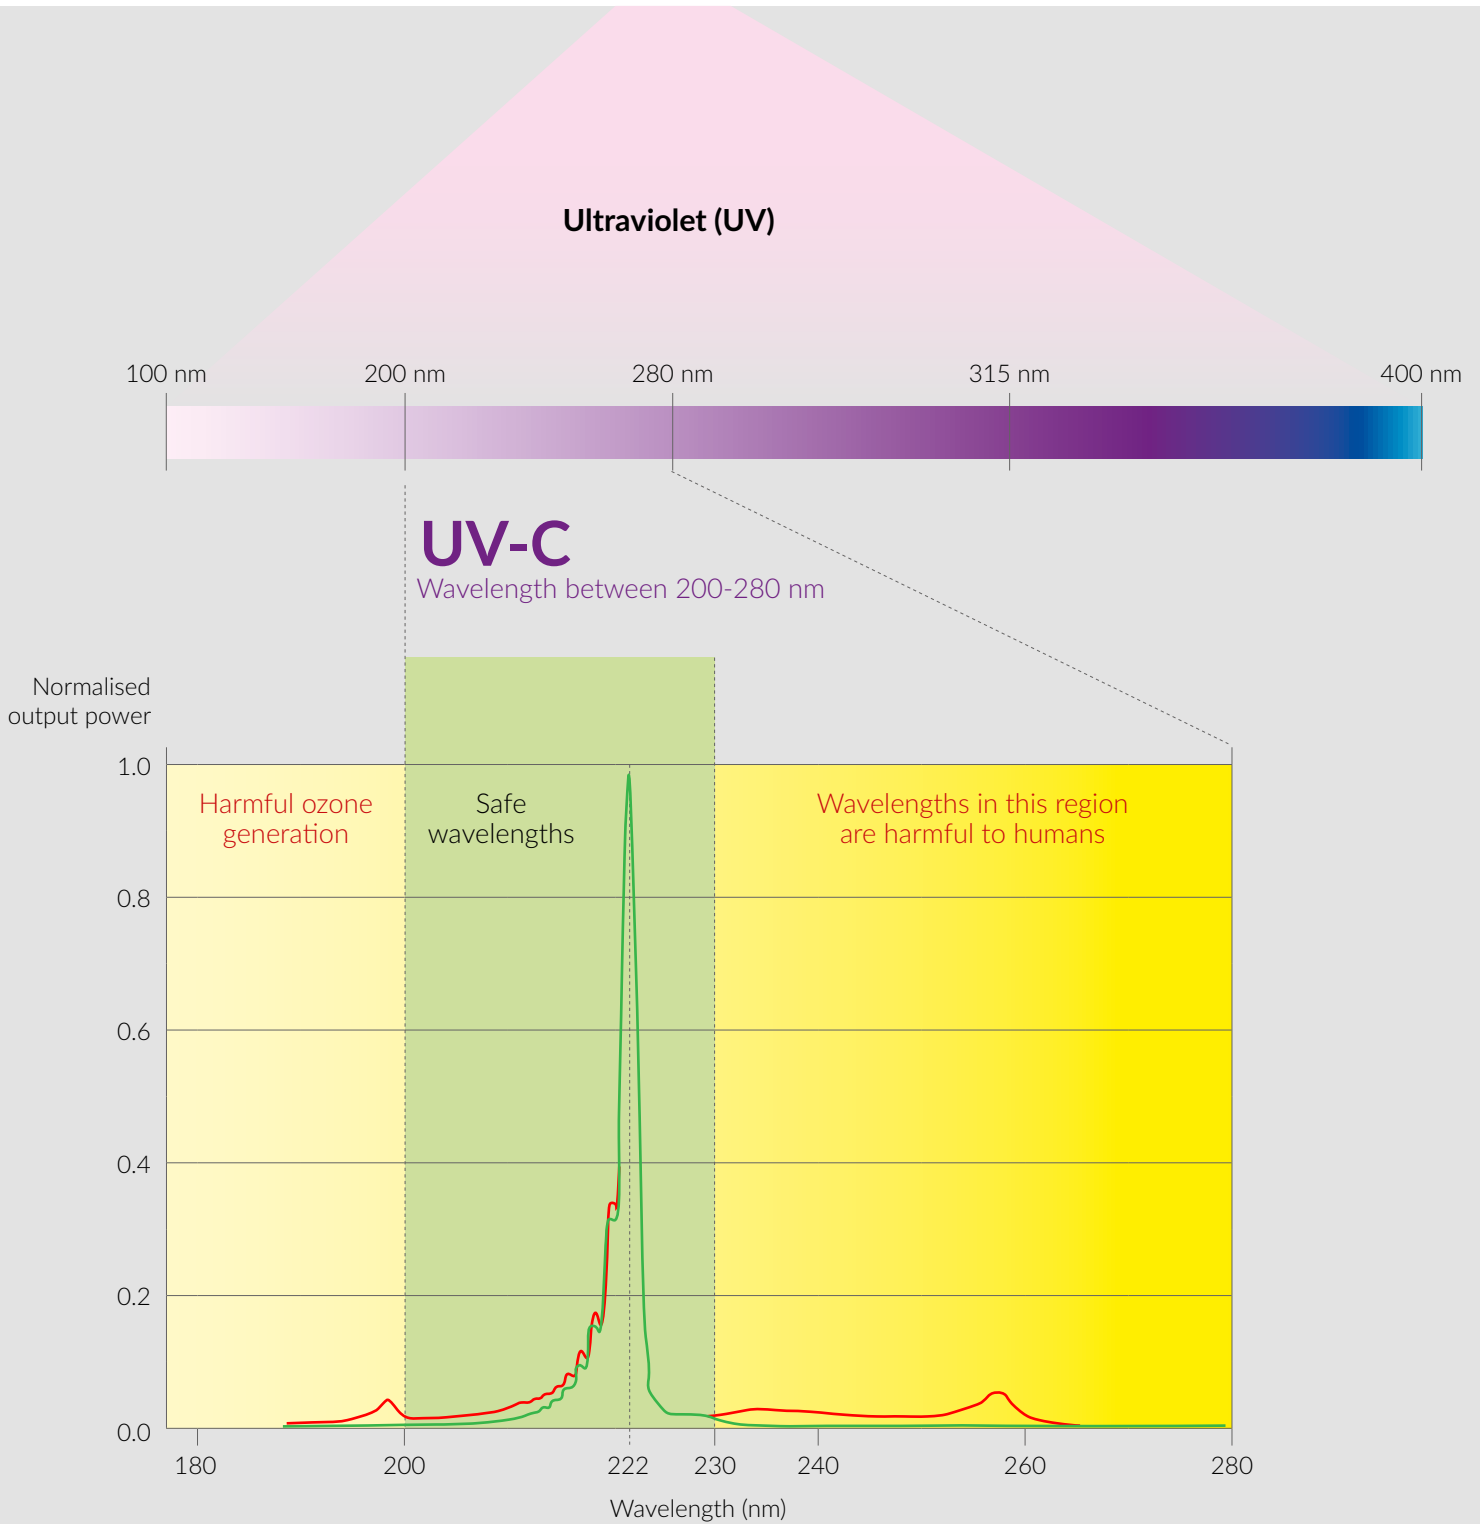

- UV222 Far UV-C excimer lamp **with** an optical band-pass filter
- A typical krypton-chloride excimer lamp **without** an optical band-pass filter

Exposure to harmful wavelengths is eliminated by an exclusive, patented optical band-pass filter.

## Contact

**B4Health**

Murillo 7  
28222 Madrid  
España

609 388 234

[info@b4health.es](mailto:info@b4health.es)  
[b4health.es](http://b4health.es)